


Deflection Indicator DI-5

DI-5 CRANKSHAFT Deflection Indicator

continues to be as popular as ever. It shares the attractive functions of the other models to provide for simple, accurate measurement but without the PC interface and without Ovality Kit option.

- Large measuring range
+2,048 to -2,048mm
- Safe and simple to use
- High repeatable accuracy
- Invar alloy extension bars for minimal expansion
- Rechargeable Lithium Ion batteries
- LED Backlight function
- Auto switch-off after 45 min. (battery saving)
- Complete set : transducer, cable, extension bars and case

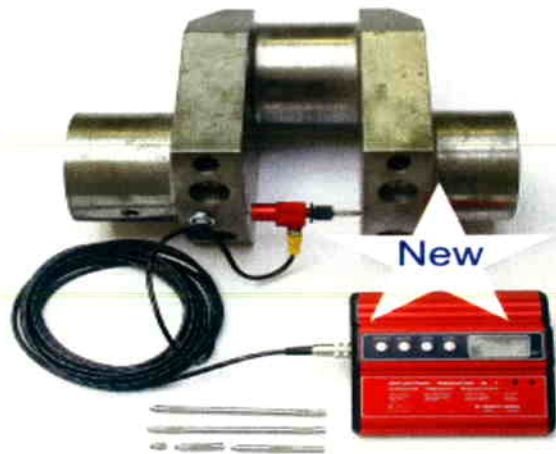

Technical specification

Measuring distance	89 - 565 mm (extendable with extra extension bars) Optional small transducer available for measurements from 60 mm
Measuring range	+ 2,048 mm to -2,048 mm
Tolerance	1% up to 1,000 mm
Resolution	0,001 mm
Zero balance range	+ 2,048 mm to - 2,048 mm
Zero drift	0,001 mm / 5 minutes
Instrument operating range	0 - 55° C/ 32 - 130° F
Transducer operating range	0 - 80° C/ 32 - 175° F
Batteries	3,6 V rechargeable Lithium Ion batteries
Battery life	10 h / charge (shelf life 5 years)
Extension bars (Invar alloy)	10, 20, 40, 80 and 2 x 160 mm
Cable length	7 meters
Weight	Instrument 1,1 kg (aluminum) Transducer 0,5 kg Case 2,7 kg (wood w/foam)
Dimensions	Instrument 190 x 167 x 50 mm Transducer Ø 31 mm, length 81 mm
Case	460 x 360 x 165 mm



138, Laxmi Plaza, Laxmi Industrial Estate,
Andheri (W). Mumbai. India 400 053
Tel : +91-22-26305914 Fax : +91-22-26352024
Email : sales@wavesmarine.com
Website www.wavesmarine.com